



1: gen image SD

Prepare a SD card, and put it into PC if the PC has SD slot, If PC has no SD slot , please do it with card reader.


Open win32diskimager.exe, Load the image data “ 7500N-20240912.rootfs.sdcard”

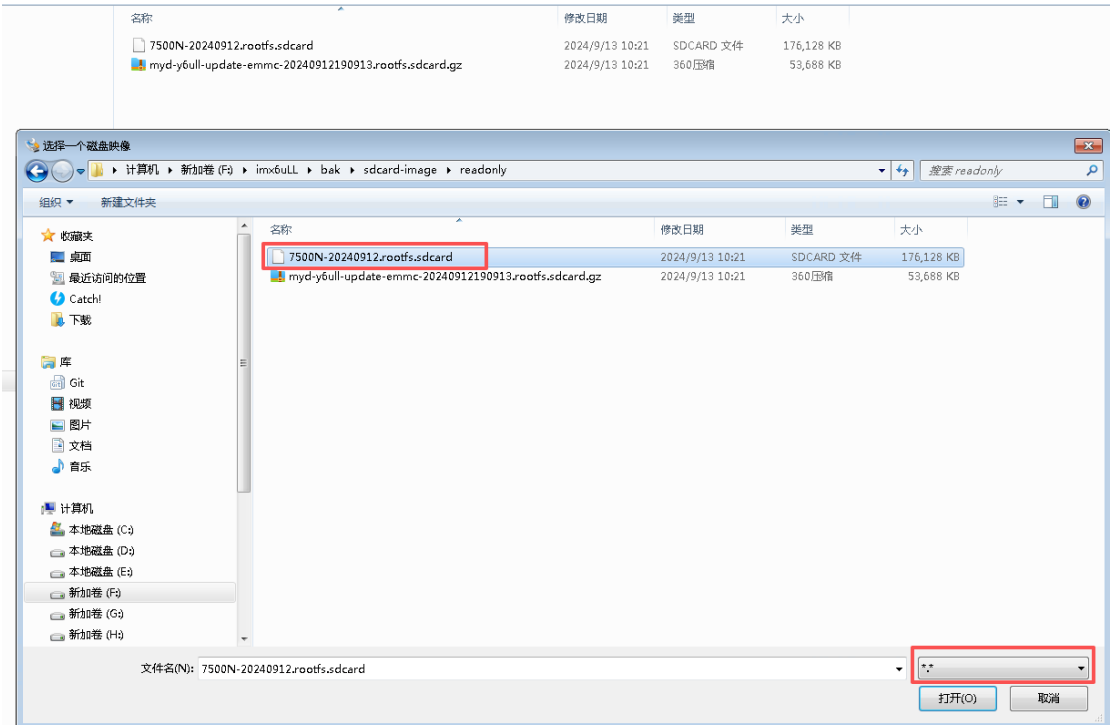


Run “write in ” button to write the image data into SD.

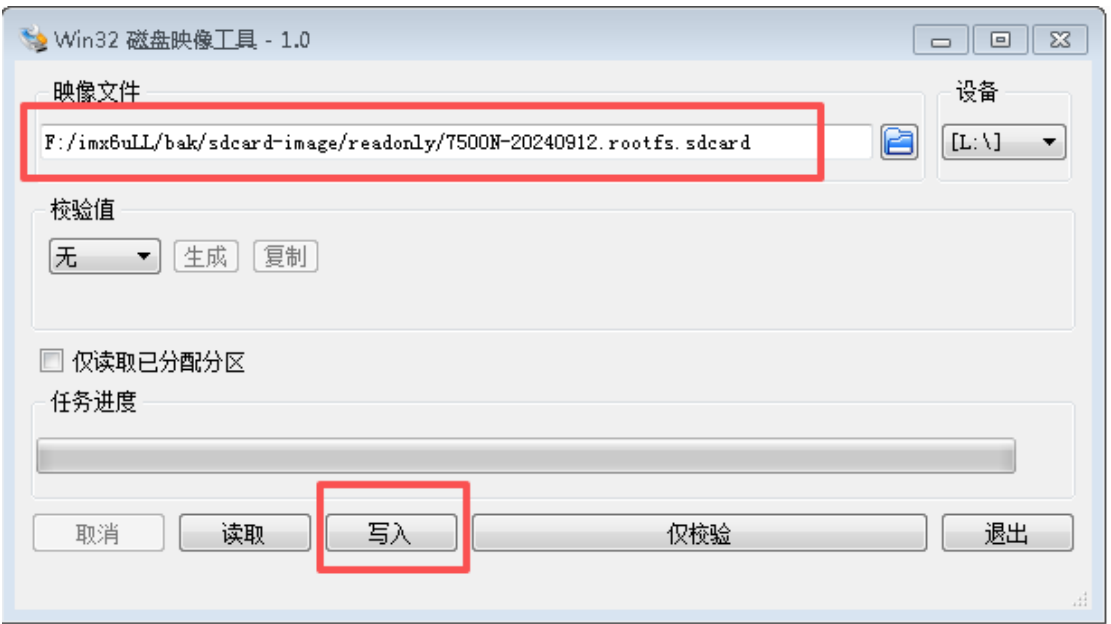

Press "Yes" to continue.

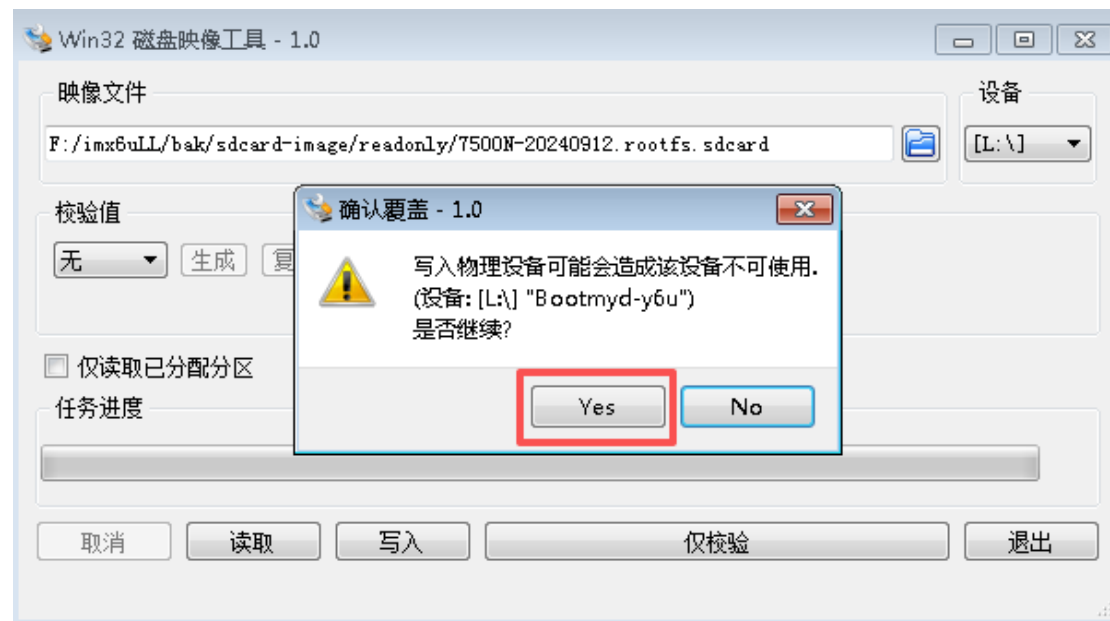

Write over !

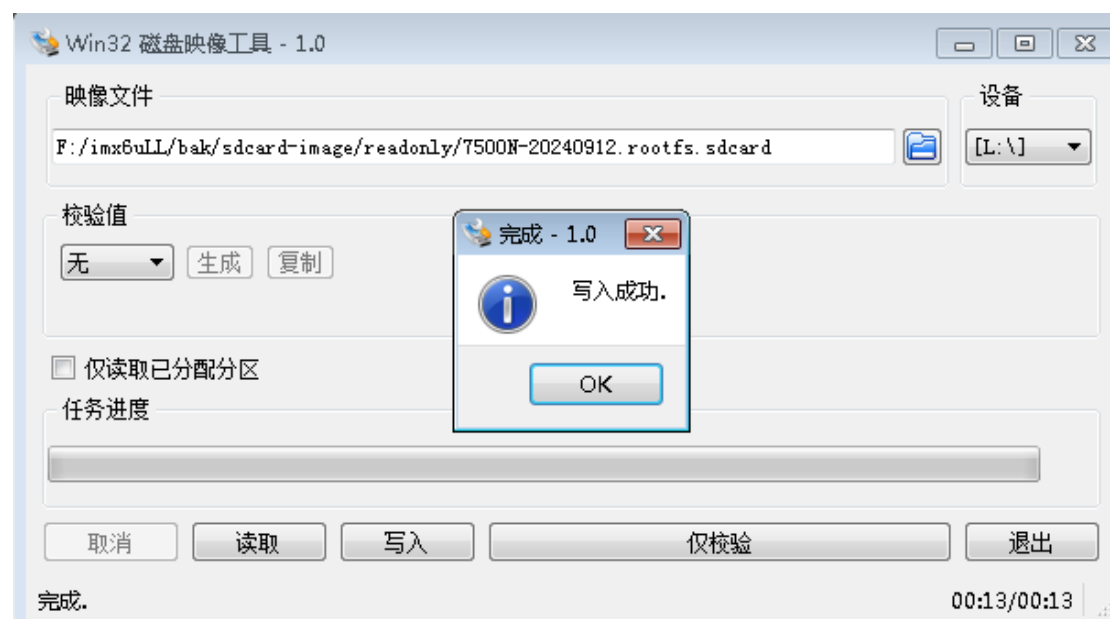

2: recover SP7500N

Step1: depart the model



Step2: remove the top board (power board) and set the switch of the core board.
Insert the SD that has image data.
Set the switch like following (recovery way).



Then put the top board (power board), and power on, **make sure wait more than 3 minutes, and recovery will be over!**

Step3: the a part of the top board, set the switch like following (the default way) , then assemble the whole model.

