




Remove Shipping Brackets Before Powering On the SBOT9

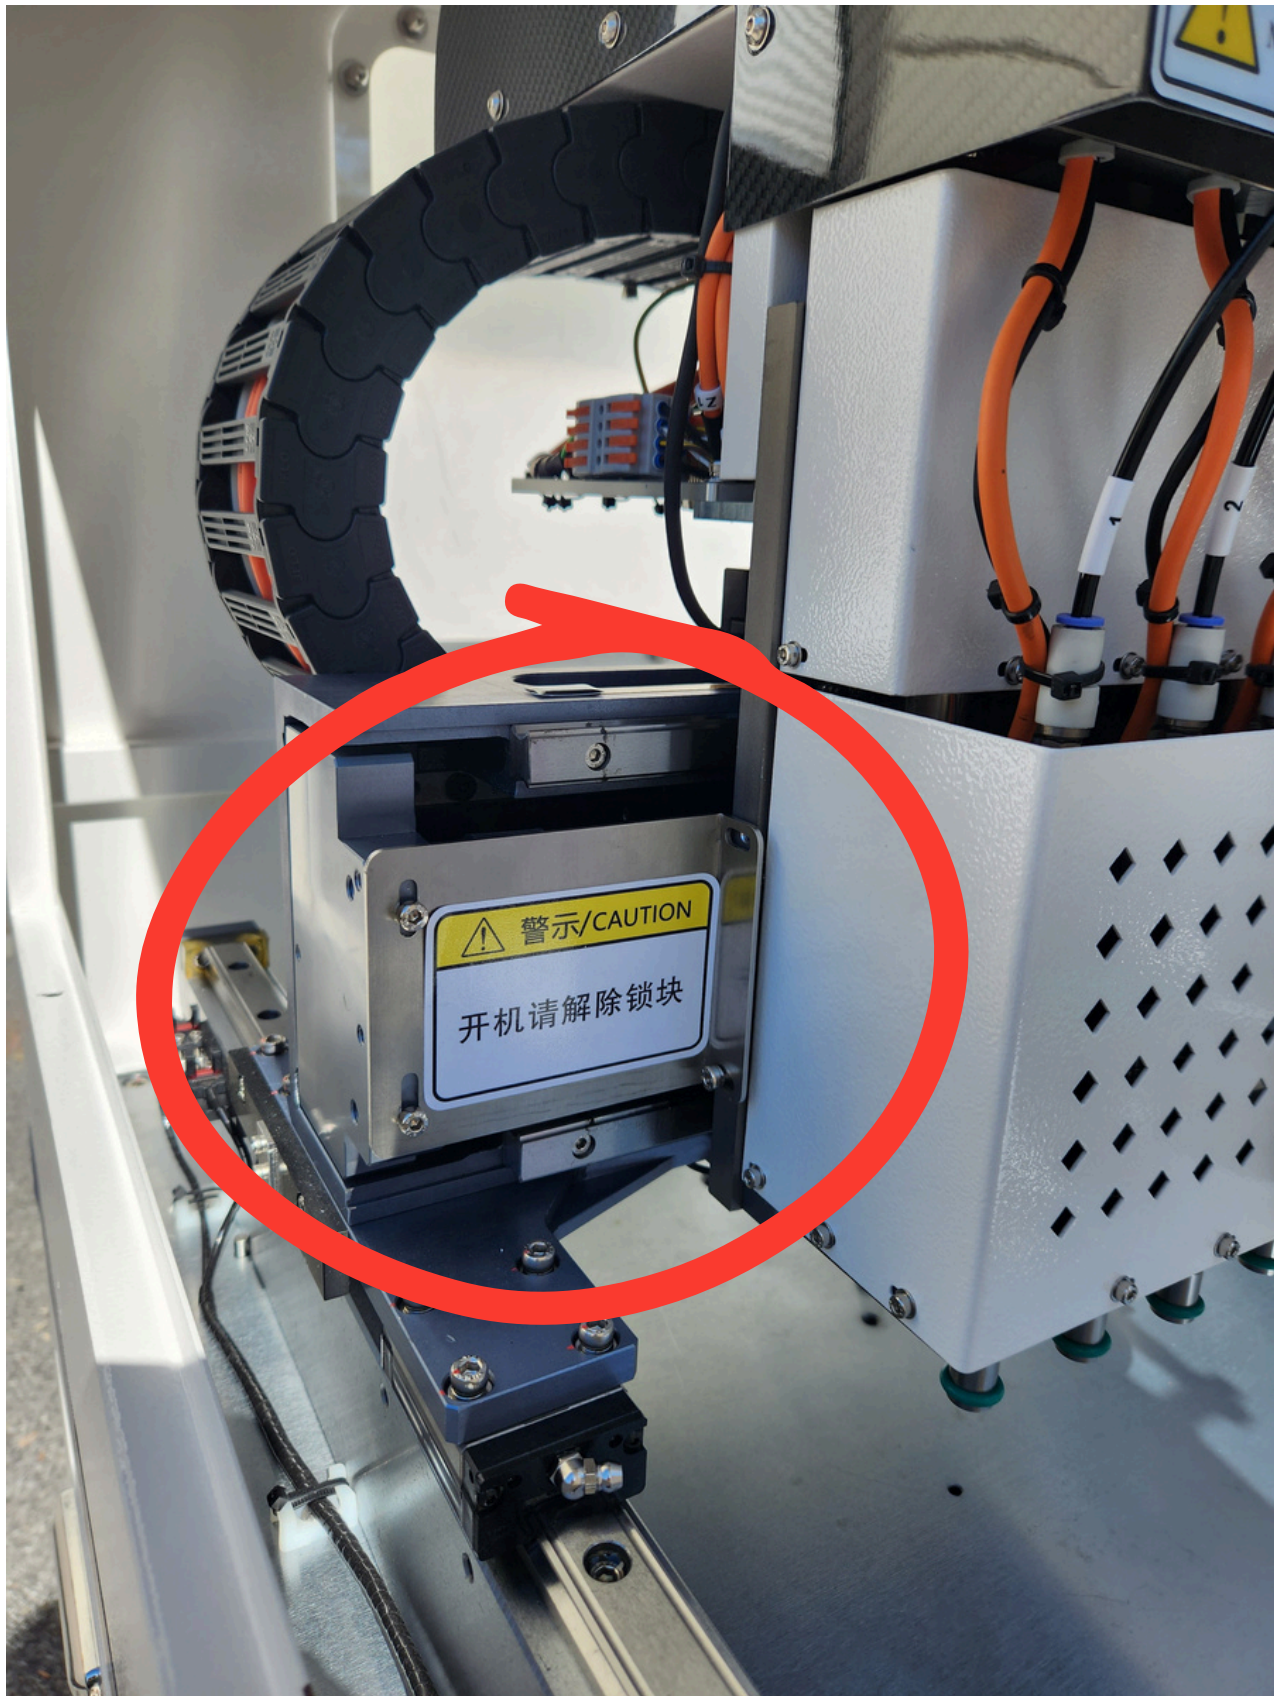

Before powering on the SBOT9, remove the shipping brackets from both the head and the arm.

Head Bracket

- Remove the left-side door panel to access the bracket.
- The bracket is secured with four screws.

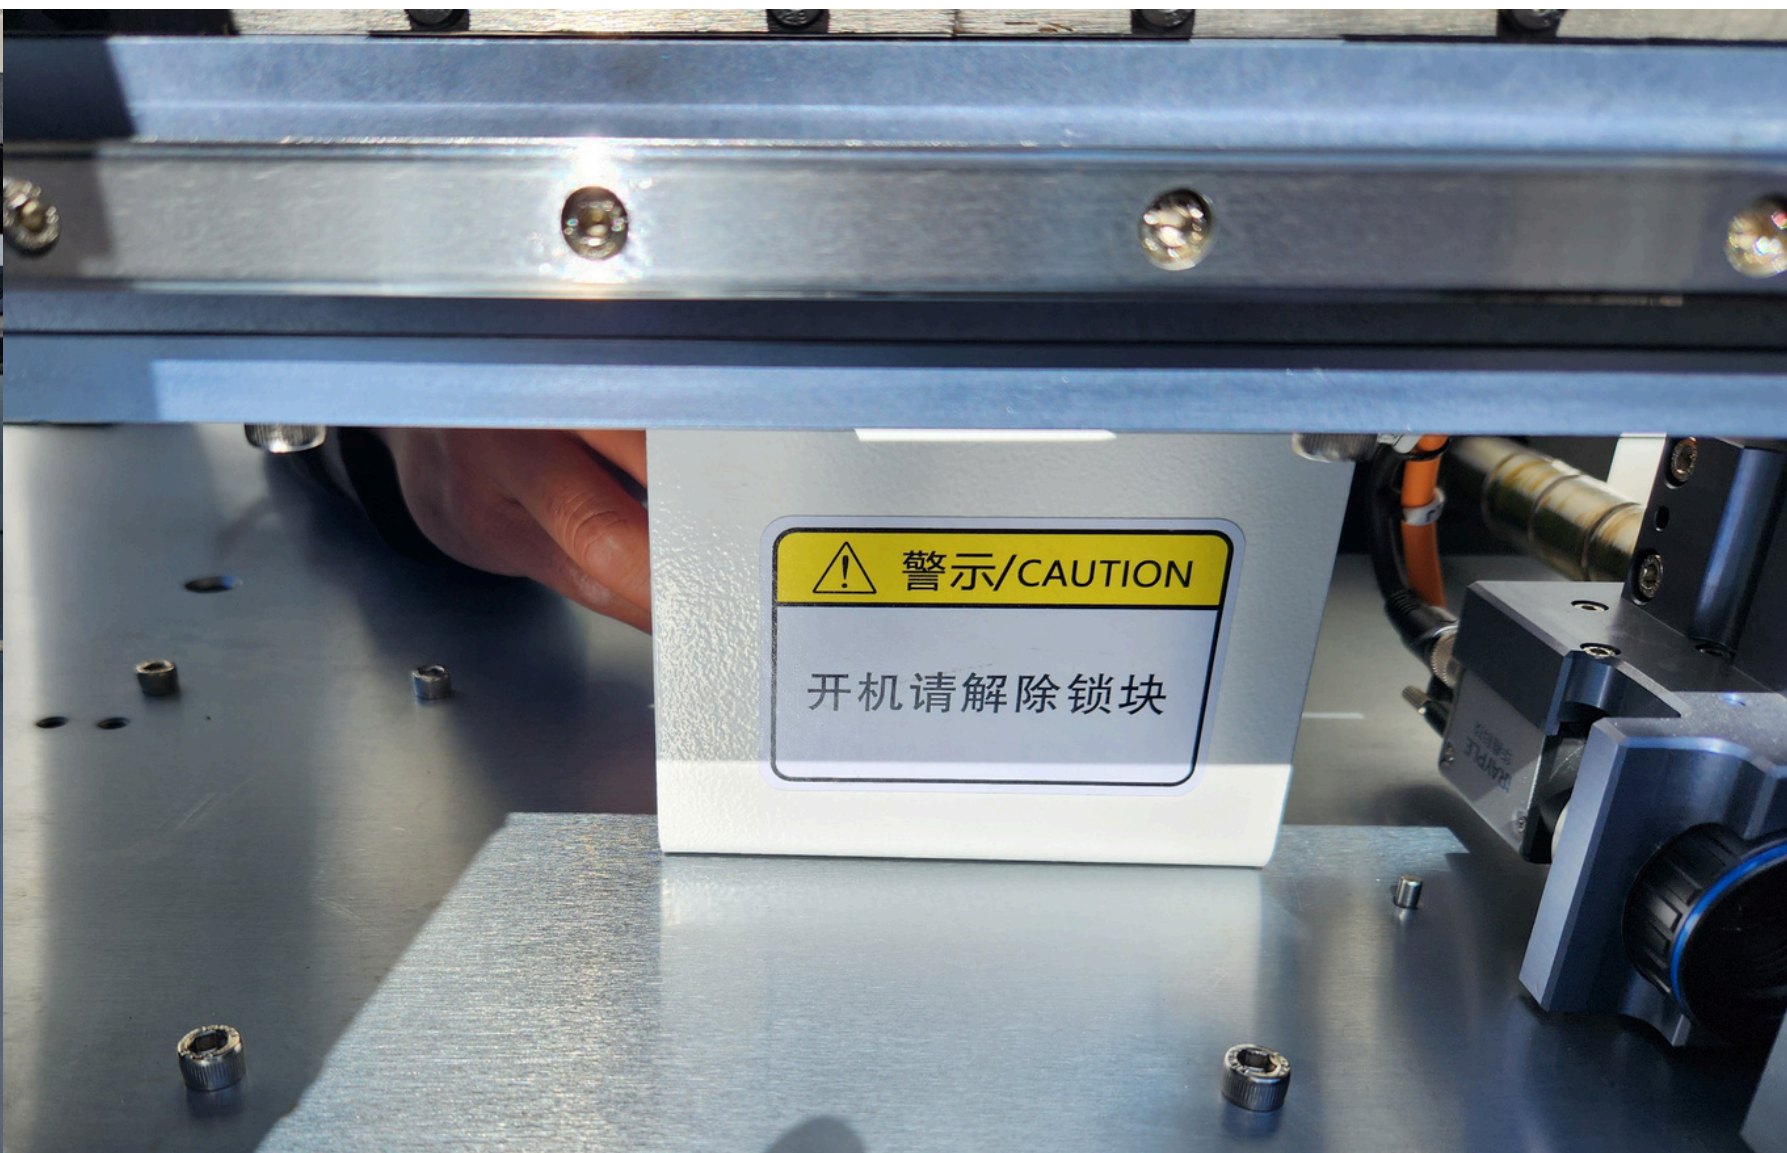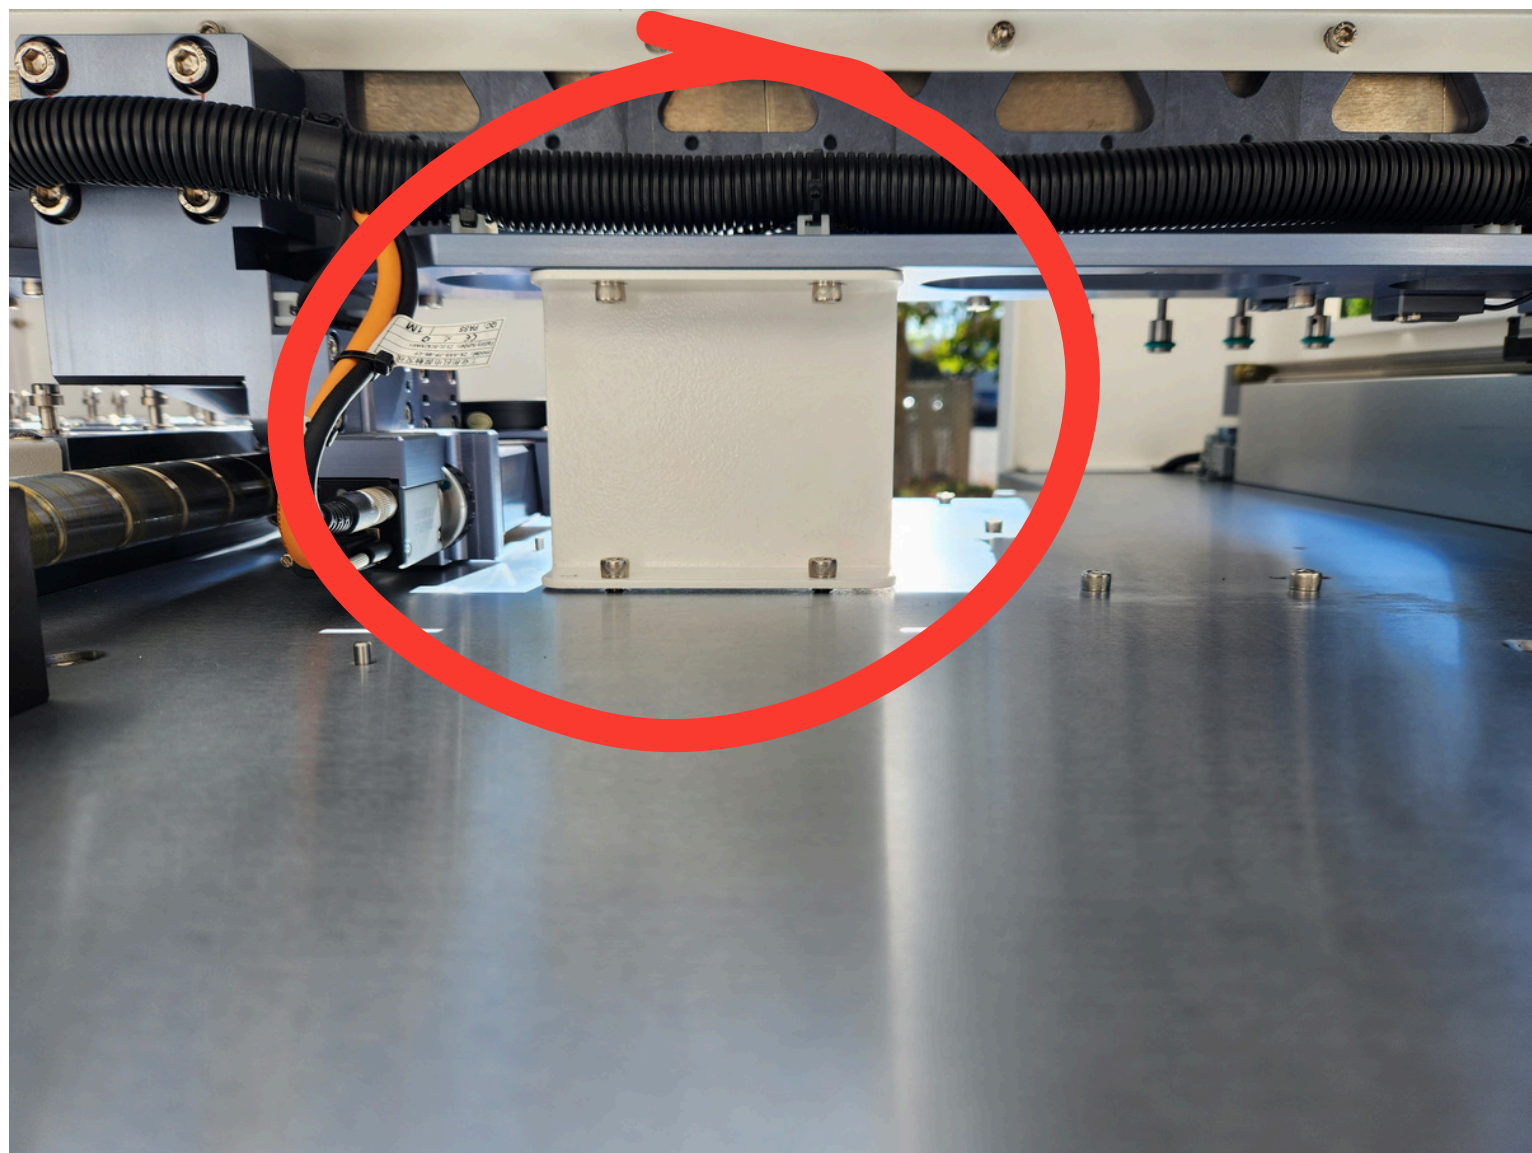

Arm Bracket

- Access the mounting screws through the rear opening where the Auto Tray is installed.
- The bracket is secured with four screws.
- Save the two bottom screws, as they will be used to secure the Auto Tray.